



Schindler 3100

Simple and practical.

Our passenger elevator for small residential buildings really gets you moving.





We keep what we promise. And we promise a lot.

A sensible choice

Are you looking for an elevator for a small residential building? Schindler 3100 is the right choice for you. The elevator is designed for a maximum of seven stops. It is sophisticated, yet simple, highly standardized and quickly installed. No complicated specifications are required. A practical and cost-effective solution.

Fits perfectly

The car of the Schindler 3100 is designed to meet the standard ISO dimensions. An elevator which is easy to plan and practical in use. An overall convenient solution.

Capacity	Car width x depth	Passengers	Shaft dimensions*
450 kg	1000 x 1250	6	1500 x 1600
480 kg	1000 x 1300	6	1500 x 1650
630 kg	1100 x 1400	8	1600 x 1750

*Applicable to cars with one-sided entrance and 800 mm door.

Conspicuously quiet

Due to the traction media, the Schindler 3100 moves very quietly. An advantage that affects the entire building.

A look that provokes envy

In addition to a stainless steel model, the car interior is available in four different, carefully selected colors to create a fresh ambience in your elevator.

Space-saving design

The Schindler 3100 has some outstanding features such as a low headroom height and a machine room-less system, which adds space for you to use. Finally, the control unit is installed directly in the doorframe. A separate control cabinet is not necessary, all of which saves space and effort.

Note

Specifications, options and colors are subject to change.

All cars and options illustrated in this brochure are representative only. The samples shown may vary from the original in color and material.

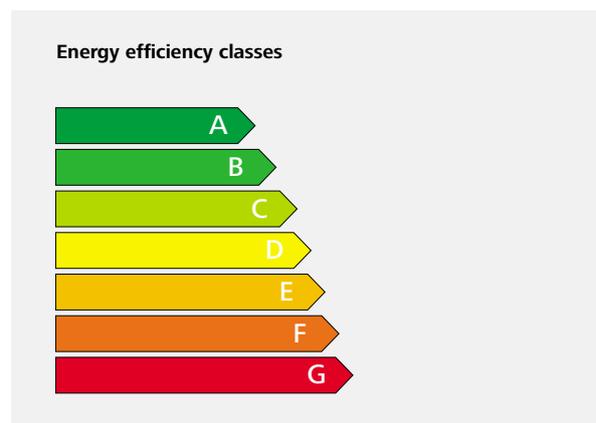
Car interior
Pisa Orange

This elevator outperforms hydraulic systems

The Schindler 3100 traction elevator is an ideal alternative to hydraulic systems, because it uses less energy and emits no odors.

Efficient system

The Schindler 3100 is environmentally friendly and economical in the use of resources. An efficient, fully engineered product, in which all parts are perfectly adjusted to each other. Ratings by run by Schindler and independent third parties show that on average the Schindler 3100 provides an energy efficiency classification in the "green" range. The effects are noticeable.














The measurement standard is VDI 4707 established in March 2009 by the Association of German Engineers.

Key figures

Capacity	450–630 kg, 6/8 passengers
Travel height	Max. 20 m, max. 7 stops
One-sided entrance*	450 kg / 480 kg, 630 kg
Two-sided entrance*	450 kg / 480 kg, 630 kg
Door width*	800 mm, 900 mm
Door height*	2000 mm, 2100 mm
Drive	Gearless/frequency-controlled
Speed	0.63 m/s, 1.0 m/s
Control	Push-button control and down collective control
Interior	Four colors and stainless steel

* For possible combinations, see the planning data on page 10.

<p>Walls</p>	 <p>Colored deco Arles Yellow</p>	 <p>Colored deco Pisa Orange</p>	 <p>Colored deco Athens Blue</p>	 <p>Colored deco Turin Grey</p>
 <p>Stainless steel linen</p>	 <p>Stainless steel brushed</p>			
				
				
				
<p>Ceiling Floor Door area Baseboard</p>	 <p>Ceiling Grey laminate</p>	 <p>Floor Black speckled rubber</p>	 <p>Floor Black artificial granite</p>	 <p>Car door and front White aluminum paint</p>
 <p>Car door and front Stainless steel linen</p>	 <p>Car door and front Stainless steel brushed</p>	 <p>Baseboard Anodized grey aluminum</p>		

Sometimes it's easy to be colorful, isn't it?



Arles Yellow



Pisa Orange



Athens Blue



Turin Grey



Stainless steel linen



Stainless steel brushed

The car is attractive. Arles Yellow, Pisa Orange, Athens Blue and Turin Grey are fresh shades that are unusually inviting due to their brilliance and brightness. Combine them with a dark rubber or granite floor and a light grey laminate ceiling.

The same is true for the stainless steel model. Stainless steel in a linen or brushed finish looks elegant. The lighting is embedded in the ceiling and gives off a pleasant light. Upon request, the car can be enhanced with a half-length mirror and handrail.

Quality is not necessarily expensive, and complex is not necessarily complicated.

Car operating panels

The car operating panel with white printed background is available with push buttons. The buttons emphasize functionality and are designed to standard. The panel ensures that communication with passengers are absolutely reliable, clear and unmistakable.

Standard:

- Door open and alarm button
- Braille
- Visual and audible confirmation of call

Options:

- Position indicator
- Voice floor announcement (selected languages)
- Direction arrows for memory push button control
- Pre-announcing arrows for collective controls

Landing operating panels

Standard:

- Stylish panel with push button

Options:

- Braille
- Key switch on landing



Car position indicator



Car operating panel, push buttons



Landing operating panel, push button

Handrail



Ceiling



Mirror

Upon request, a half-length mirror of safety glass will be provided on one side wall or on the rear wall.

Handrail

The handrail matches the colors and shapes of the other interior elements. It may be mounted to a side wall or to the rear wall.

Doors

Doors are equipped with a frequency-controlled drive for fast and reliable operation. Telescopic sliding doors are available opening to the left or to the right.

Car doors

Standard:

- White aluminum paint

Option:

- Stainless steel

Landing doors

Standard:

- Prime painted

Options:

- Stainless steel
- Fronts (Facade) in shaft width

Baseboard



Car operating panel



Control

The control system is based on low-energy multi-processor technology. The compact, main control unit is integrated in the doorframe and includes push-button control and down collective control.

Control functions

Standard:

- Self-diagnostic, self-testing
- Photocell protection on doors
- Overload detection
- Permanent two way communication with an assistance center

Options:

- Automatic evacuation to nearest floor
- Automatic return to the main floor from all floors
- Restricted access to floors (access via key switch)
- Double entrance with parallel operation
- Fireman's control
- Light curtain
- Independent service via in-car reservation key
- Handicapped options (DM236 for Italy)
- Alarm horn on car or in shaft

Special options for parking floors

- Car call by key
- Automatic return to the main floor from parking floors

Drive

The Schindler 3100 requires a small drive. It saves much more space compared to previous drives; it can be installed directly in the headroom and does not require a machine room. The drive is economical in energy consumption and causes minimum noise due to the material of the traction media – in the car and in the entire building. Real comfort.

Traction media

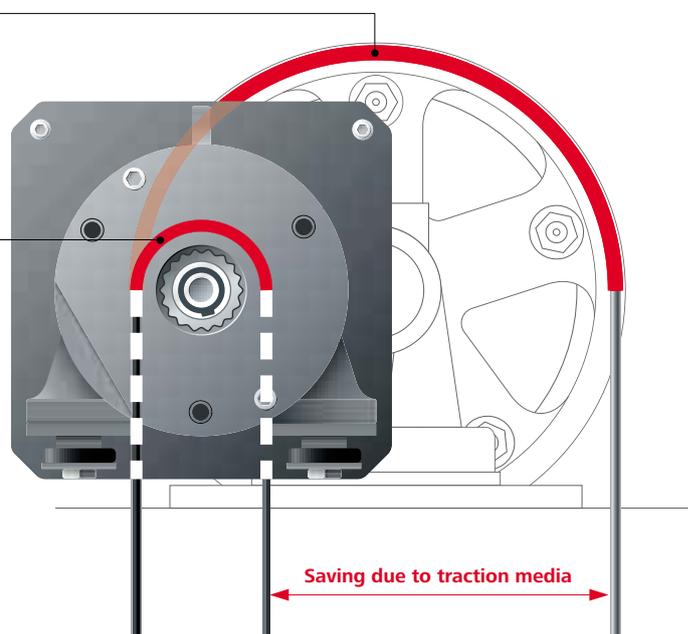
Traction media replace conventional steel cables, weigh less, require less space, and run more quietly. Thanks to the traction media, the gearless drive needs no oil for lubrication – an environmental friendly solution.

Previously: steel cables

Steel cables are relatively inelastic. They need a traction sheave diameter of at least 320 mm with the cable diameters required for elevators. The complete conventional motor including drive gears must be large enough to match. A system that requires space.

New: traction media

Traction media are flexible. They use a much smaller traction shaft diameter than steel cables. 72 mm is enough, requiring a much smaller motor. A design that saves space.



We design today what you need tomorrow. See for yourself.



Planning

The Schindler 3100 requires no machine room. For you, this means less planning. Only one space, the elevator shaft, has to be designed. Standardized plans simplify the process, making it fast and efficient.



Order

The design of the Schindler 3100 is sophisticated, yet simple. The key factors are quickly established. Since there are no complicated specifications it is easy to place an order. You will quickly and effortlessly find the product that fits your needs.



Delivery

We deliver the Schindler 3100 completely assembled and all at once, and not before the building is ready for the elevator installation.



Installation

The mountings are easily positioned directly in the floor; the elevator is quickly installed. No cranes or scaffoldings are required. The system is ready in about two weeks. A well-thought-out process.

A straight line is the shortest route, and we are taking it.

Machine room-less traction elevator with frequency-controlled drive
450/480 kg, 630 kg capacity, 6, 8 passengers

Capacity		Passengers max.		Speed		Travel height max.		Number of stops max.		Available entrances max.			Car			Door			Shaft				
GQ kg	VKN m/s	HQ m	ZE	BK mm	TK mm	HK mm	Type	BT mm	HT mm	BS mm	*1 TS mm	*2 TS mm	HSG mm	HSK mm									
450	6	0.63	20	7	2	1000	1250	2135	T2	800	2000/2100	1500	1600	1800	1100	3400							
		1.0	20	7	2	1000	1250	2135	T2	800	2000/2100	1500	1600	1800	1100	3400							
480	6	0.63	20	7	2	1000	1300	2135	T2	800	2000/2100	1500	1650	1850	1100	3400							
		1.0	20	7	2	1000	1300	2135	T2	800	2000/2100	1500	1650	1850	1100	3400							
630	8	0.63	20	7	2	1100	1400	2135	T2	800	2000/2100	1600	1750	1950	1100	3400							
		1.0	20	7	2	1100	1400	2135	T2	800	2000/2100	1600	1750	1950	1100	3400							

GQ Capacity
VKN Speed
HQ Travel height
ZE Stops
HE Interfloor distance

BK Car width
TK Car depth
HK Car height

T2 Telescopic door,
2-part
BT Door width
HT Door height

BS Shaft width
TS Shaft depth
*1 1 entrance
*2 2 entrances
HSG Pit depth
HSK Headroom height

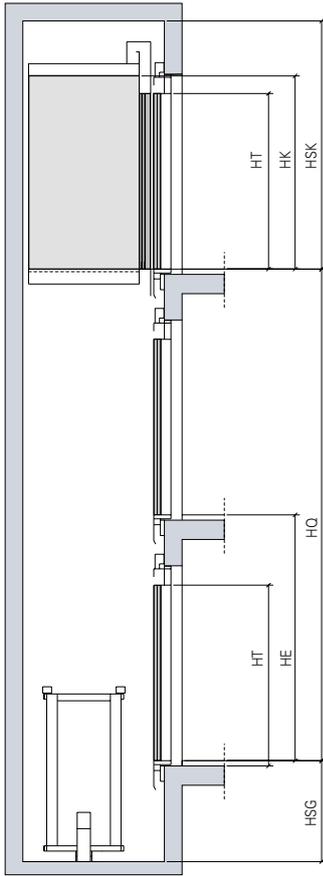
Interfloor distance (HE) is:
min. 2400 mm for door height 2000 mm
min. 2500 mm for door height 2100 mm

HE for two-stop installations is min. 2600mm
for door height 2000mm and 2100mm.


The short interfloor distance (HE min.) for
opposite entrances is 300 mm.

EC Master Builder Certificate in accordance
with Elevator Directive 95/16/EC


Height and layout




One-sided entrance

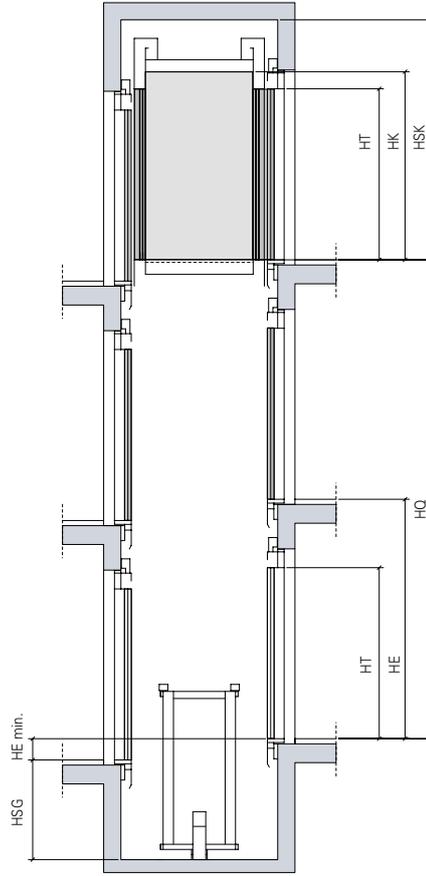

Two-sided entrance



One-sided entrance,
telescopic door



Two-sided entrance,
telescopic door

For further information, such as proposals, construction plans and pricing, please contact our Sales Department directly.

We are always close to you, regardless of the distance.

For additional information and the location of
your nearest Schindler branch, please contact:

www.schindler.com